


Hybridväxelriktare, 5 kW / 3-fas

MOD-05K-D04LVP3

Bekijk dit
product in
onze
webshop

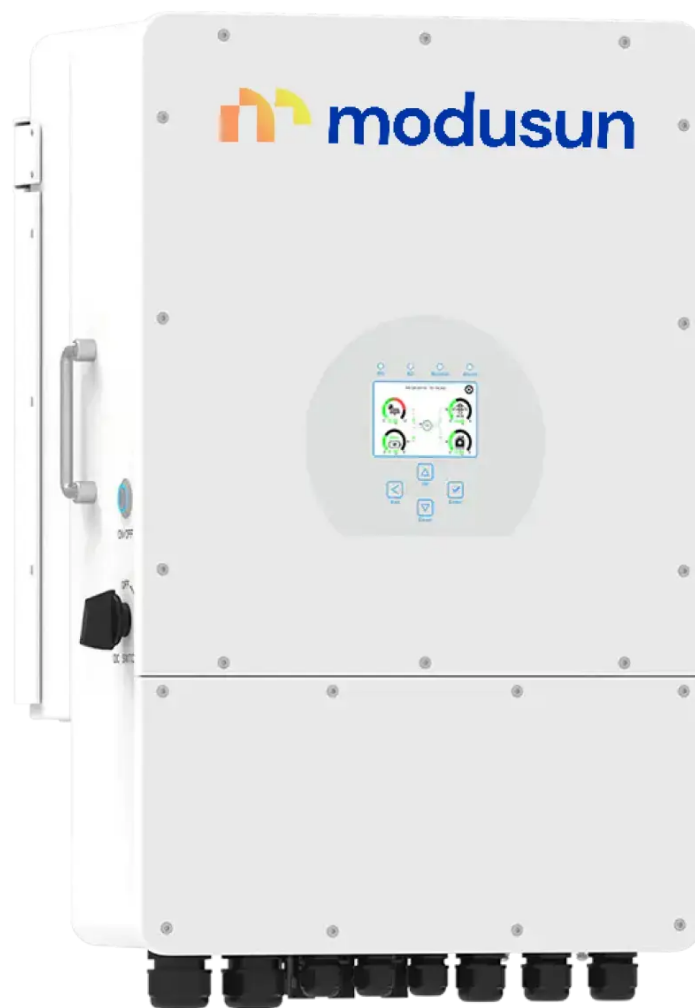

24.05.2026 - Disclaimer: wijziging van gegevens voorbehouden

- ✓ 100 % obalanserad belastning möjlig – idealisk för ojämna faser.
- ✓ AC-koppling – enkel integration i befintliga solcellsanläggningar.
- ✓ Upp till 10 enheter parallellt – lämpad för både on-grid och off-grid-drift, inklusive batteriexpansion.
- ✓ Robust laddnings- och urladdningskapacitet upp till 120A.
- ✓ Lämplig för energilagring från dieselgeneratorer – även i off-grid-miljöer.
- ✓ UPS (avbrottsfri kraft) som gör att strömförsörjningen automatiskt och nästan utan avbrott växlar till batteridrift vid strömavbrott, så att viktiga laster fortsätter fungera säkert.
- ✓ Säkra 48 V DC-lågspänningsbatterier – flexibelt skalbara och installationsvänliga.
- ✓ Sömlös integration med SMARTHUB-EMS för intelligent energihantering.

Technische specificaties:

Battery Input Data	
Battery Type	Lithium-ion
Battery Voltage Range (V)	40 - 60
Max. Discharging Current (A)	120
Max. Charging Current (A)	120
Charging Strategy for Li-ion Battery	Self-adaption to BMS
Number of Battery Input	1

PV String Input Data	
Max. PV Access Power (W)	10.000
Max. PV Input Voltage (V)	800
Start-up Voltage (V)	160
MPPT Voltage Range (V)	160-650
Max. Operating PV Input Current (A)	13+13
Max. Input Short Circuit Current (A)	17+17
No. of MPP Trackers/No. of Strings MPP Trackers	2/1+1


24.05.2026 - Disclaimer: wijziging van gegevens voorbehouden

AC Input/Output Data	
Rated PV Input Voltage (V)	550
Rated AC Input/output current (A)	7.6/7.2
Max. AC input/output Current (A)	8.4/8
Max. Continuous AC Passthrough (grid to Load)(A)	45
Peak Power (off-grid)(W)	2 times of rated power, max 10seconds
Power Factor Adjustment Range	0.8 leading to 0.8 lagging
Rated Input/Output Voltage/Rang (V)	220/380V, 230/400V 0.85Un-1.1Un
Rated Input/Output Grid Frequency/Range (Hz)	50/45-55, 60/55-65
Grid connection Form	3L+N+PE
Total Current Harmonic Distortion THDi	3% (of nominal power)
DC Injection Current	0.5% In
Efficiency	
Max. Efficiency	97.6%
Euro Efficiency	97.0%
MPPT Efficiency	>99%
Equipment Protection	
Integrated	DC Reverse Polarity Protection, AC Output Overcurrent Protection, Thermal Protection, AC Output Overvoltage Protection, AC Output Short Circuit Protection, DC Component Monitoring, Arc Fault Circuit Interrupter (optional), Anti-islanding Protection, DC Switch, Insulation Impedance Detection, Residual Current Detection.
Surge Protection Level	TYPE II(DC), TYPE II(AC)
Interface	
Communication Interface	RS485/RS232/CAN
Monitor Mode	GPRS/WIFI/Bluetooth/4G/LAN(optional)

24.05.2026 - Disclaimer: wijziging van gegevens voorbehouden

General Data	
Brand	Ningbo Deye Inverter Technology Co., Ltd.
Operating Temperature Range (?)	-40 to +60?, >45? Derating
Permissible Ambient Humidity	0-100%
Permissible Altitude	2.000m
Noise (dB)	?55
Ingress Protection (IP) Rating	IP 65
Inverter Topology	Non-Isolated
Over Voltage Category	OVC II(DC), OVC III(AC)
Cabinet Size (WxHxD) (mm)	422x658x254 (Excluding Connectors and Brackets)
Weight (kg)	38
Type of Cooling	Intelligent Air Cooling
Warranty	5 Years/10 Years. The Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G98, G99, VDE-AR-N 4105
Safety / EMC Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2

24.05.2026 - Disclaimer: wijziging van gegevens voorbehouden

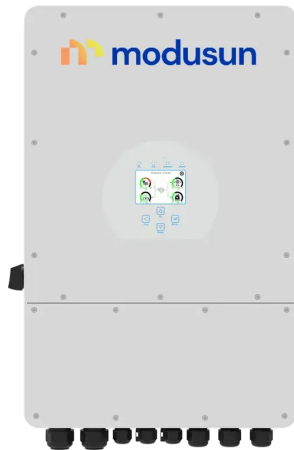

24.05.2026 - Disclaimer: wijziging van gegevens voorbehouden