


Hybridväxelriktare, 10 kW / 3-fas

MOD-10K-D04LVP3

Bekijk dit
product in
onze
webshop

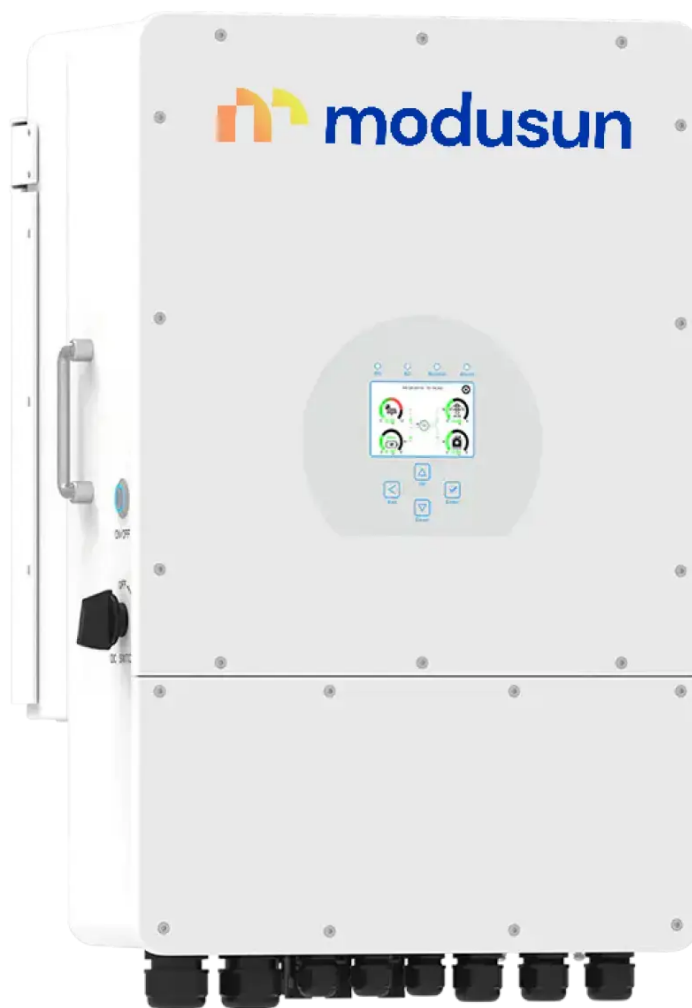

24.05.2026 - Disclaimer: wijziging van gegevens voorbehouden

- ✓ 100 % obalanserad utgång – per fas finns upp till 50 % av den nominella effekten tillgänglig.
- ✓ AC-koppling – lämpad för retrofit i befintliga solcellsanläggningar.
- ✓ Parallell drift – upp till 10 enheter parallellt för både on-grid- och off-grid-tillämpningar.
UPS (avbrottsfri kraft) som gör att strömförsörjningen automatiskt och nästan utan avbrott växlar till batteridrift vid strömavbrott, så att viktiga laster fortsätter fungera säkert.
- ✓ Flexibel batterikonfiguration – stöd för flera batterier parallellt.
- ✓ Hög laddnings-/urladdningseffekt – upp till 210 A laddnings- och urladdningsström.
- ✓ Säkert lågspänningssystem – 48 V-batteri med transformatorisolerad konstruktion.
- ✓ Smart energihantering – upp till 6 konfigurerbara tidsfönster för laddning och urladdning.
- ✓ Stöd för dieselgenerator – möjlighet att lagra energi från generatorer.
- ✓ Sömlös integration – fullständig koppling till SMARTHUB-EMS för intelligent energihantering.

Technische specificaties:

Battery Input Data	
Battery Type	Lithium-ion
Battery Voltage Range (V)	40 - 60
Max. Discharging Current (A)	210
Max. Charging Current (A)	210
Charging Strategy for Li-ion Battery	Self-adaption to BMS
Number of Battery Input	1

24.05.2026 - Disclaimer: wijziging van gegevens voorbehouden

PV String Input Data	
Max. PV Access Power (W)	20.000
Max. PV Input Power (W)	15.000
Max. PV Input Voltage (V)	800
Start-up Voltage (V)	160
MPPT Voltage Range (V)	200-650
Max. Operating PV Input Current (A)	26+13
Max. Input Short Circuit Current (A)	34+17
No. of MPP Trackers/No. of Strings MPP Trackers	2/2+1
AC Input/Output Data	
Rated PV Input Voltage (V)	550
Rated AC Input/Output Active Power(W)	10.000
Max. AC input/output Apparent Power (VA)	11.000
Rated AC Input/output current (A)	15.2/14.5
Max. AC input/output Current (A)	16.7/15.9
Max. Continuous AC Passthrough (grid to Load)(A)	45
Peak Power (off-grid)(W)	2 times of rated power, max 10seconds
Power Factor Adjustment Range	0.8 leading to 0.8 lagging
Rated Input/Output Voltage/Range (V)	220/380V, 230/400V 0.85Un-1.1Un
Rated Input/Output Grid Frequency/Range (Hz)	50/45-55, 60/55-65
Grid connection Form	3L+N+PE
Total Current Harmonic Distortion THDi	3% (of nominal power)
DC Injection Current	0.5% In

24.05.2026 - Disclaimer: wijziging van gegevens voorbehouden

Efficiency	
Max. Efficiency	97.6%
Euro Efficiency	97.0%
MPPT Efficiency	>99%
Equipment Protection	
Integrated	DC Reverse Polarity Protection, AC Output Overcurrent Protection, Thermal Protection, AC Output Overvoltage Protection, AC Output Short Circuit Protection, DC Component Monitoring, Arc Fault Circuit Interrupter (optional), Anti-islanding Protection, DC Switch, Insulation Impedance Detection, Residual Current Detection.
Surge Protection Level	TYPE II(DC), TYPE II(AC)
Interface	
Communication Interface	RS485/RS232/CAN
Monitor Mode	GPRS/WIFI/Bluetooth/4G/LAN(optional)
General Data	
Brand	Ningbo Deye Inverter Technology Co., Ltd.
Operating Temperature Range (?)	-40 to +60?, >45? Derating
Permissible Ambient Humidity	0-100%
Permissible Altitude	2.000m
Noise (dB)	?55
Ingress Protection (IP) Rating	IP 65
Inverter Topology	Non-Isolated
Over Voltage Category	OVC II(DC), OVC III(AC)
Cabinet Size (WxHxD) (mm)	422x658x254 (Excluding Connectors and Brackets)
Weight (kg)	38
Type of Cooling	Intelligent Air Cooling
Warranty	5 Years/10 Years. The Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G98, G99, VDE-AR-N 4105
Safety / EMC Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2

24.05.2026 - Disclaimer: wijziging van gegevens voorbehouden

Package contents


Included

Hybrid inverter x1, Wall mouning bracket x1, Stainless steel anti-collision bolt M8x80 x4, Parallel communication cable x1, Battery temperature sensor x1, User manual x1, Sensor Clamp x3, DC+/DC-Plug connectors including metal terminal xN , WIFI Datalogger

box of magnetic ring

Magnetic ring for battery x1 (80x50x20 mm), Magnetic ring for BMS and Meter communication cable x2 (33x23x15 mm), Magnetic ring for external temperature sensor x1 (25.9x28x13 mm), Magnetic ring x3 (31x29x19 mm), Magnetic ring for AC wires x2 (55.5x33x23 mm)

24.05.2026 - Disclaimer: wijziging van gegevens voorbehouden

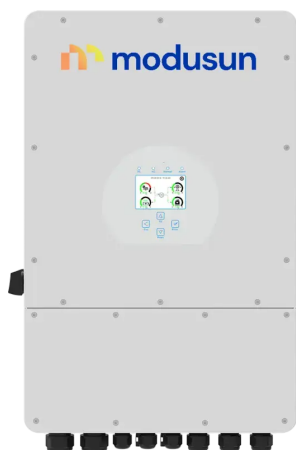

24.05.2026 - Disclaimer: wijziging van gegevens voorbehouden